




Metal Technologies, Inc.

3B-PMT-MB BT/1

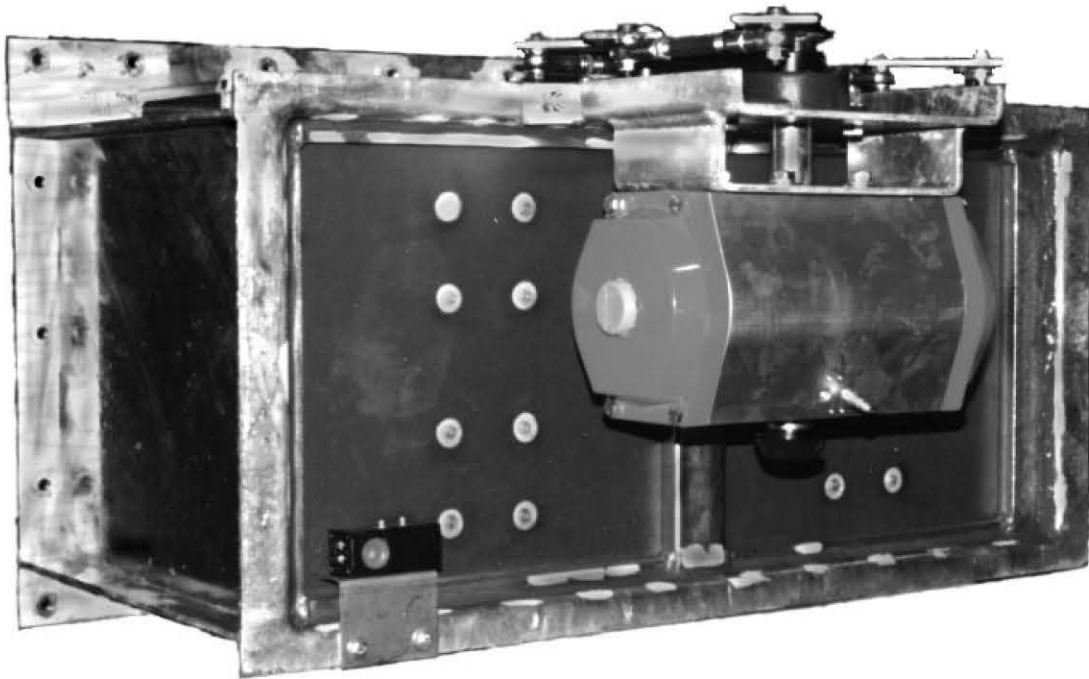

Multi Blade Bubble Tight Damper Features


- 15" w.g. Maximum Standard Static Pressure (Higher Pressure Models are Available)
- Special Configurations are Available
- Manual, Pneumatic or Electric Actuators are Available
- Rapid Close Models Available
- Complete Environmental Qualifications (Including Seismic)
- Available with Solenoid Valves or Limit Switches
- Silicone Blade Seals (Other Types are Available)
- Low Pressure Drop
- ASME AG-1, Class 0 or Class 1 Leakage Rate as Applicable
- Welding and Inspections in Accordance with AWS and/or ASME as Required
- Manufactured In Accordance With Our Quality Assurance Program

140 E. Tower Drive - Burr Ridge, Illinois - 60521 - Phone: 630.887.7700 - Fax: 630.887.0770



Metal Technologies, Inc.

3C-PMT-SB BT/1

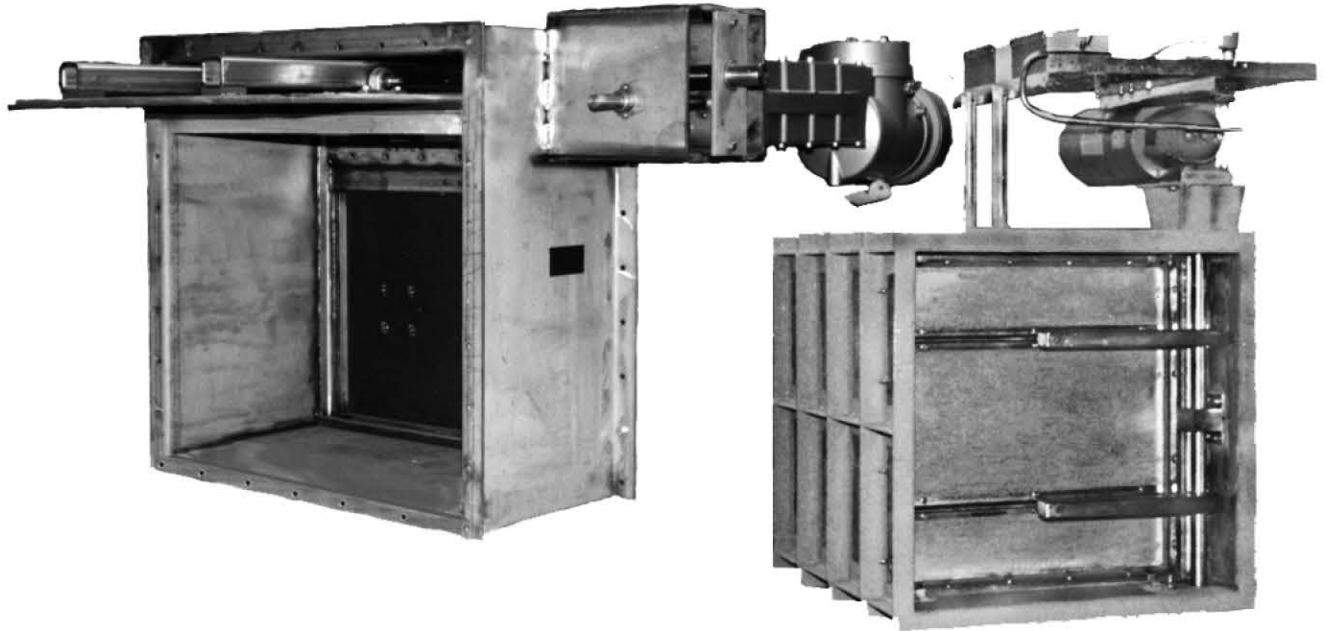

Single Blade Bubble Tight Damper Features

- 15" w.g. Maximum Standard Static Pressure (Higher Pressure Models are Available)
- Special Configurations are Available
- Manual, Pneumatic or Electric Actuators are Available
- Rapid Close Models Available
- Complete Environmental Qualifications (Including Seismic)
- Available with Solenoid Valves or Limit Switches
- Silicone Blade Seals (Other Types are Available)
- Low Pressure Drop
- ASME AG-1 Class 0 or Class 1 Leakage Rate as Applicable
- Welding and Inspections in Accordance with AWS and/or ASME as Required
- Manufactured In Accordance With Our Quality Assurance Program

140 E. Tower Drive - Burr Ridge, Illinois - 60521 - Phone: 630.887.7700 - Fax: 630.887.0770